


Alpha Heavy Duty Commercial AdBlue® Pump



- Back lit LCD display with an electronic meter calibration facility via the display
- OPTION: Dual/second sided display
- OPTION: Automatic nozzle
- OPTION: Front, left or right handed nozzle holster
- Stainless steel cabinet
- Removable side panel
- 4m hose
- External base mounting holes

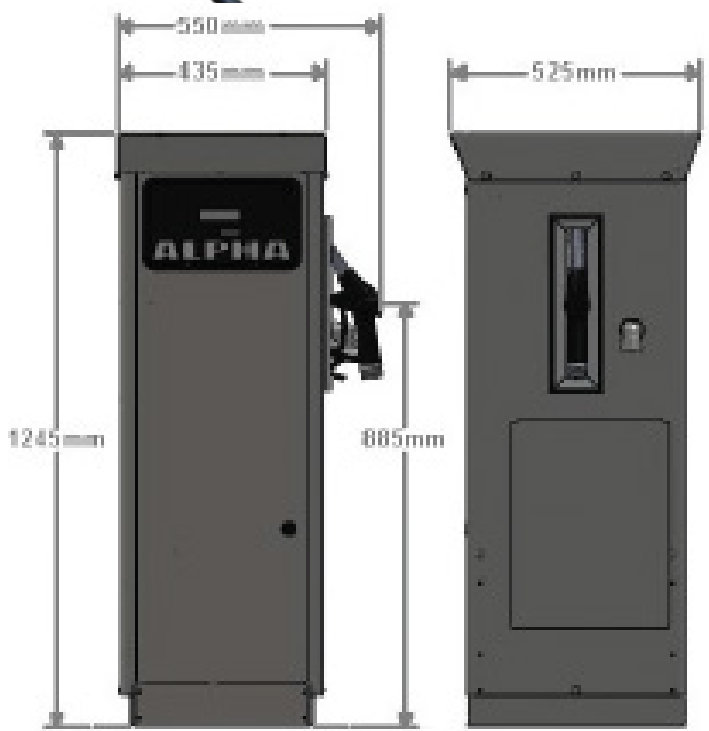

Alpha Heavy Duty Commercial AdBlue® Pump

HYTEK
Fuel Transfer Solutions

The Pumptronics AdBlue® ALPHA pump features the same stainless steel, rust free cabinet & many other parts as the best selling diesel version. However, it uses a specialist meter & other components so it is 100% compatible with AdBlue®.
The ALPHA heavy duty AdBlue® pump is available in two versions, one has a pump unit inside whilst the alternative dispenser option is fed

- Pumping Speed:** The pump unit version pumps up to 30L/min, whilst the dispenser version can dispense up to 100L/min (depending on the type of submersible pump you have fitted in your tank.)
- Accuracy:** +/- 0.5%.
- Display:** Single sided electronic display shows up to 9,999.99 litres, the electronic totaliser keeps an ongoing total of fuel used up to 99,999,999 litres. Dual sided display optional.
- Nozzle Operated:** No switches, levers or handles to operate or break. Simply remove the nozzle & the pump starts, replace & the pump stops. Next time you remove the nozzle the display resets.
(Nozzle not included, choose the make you prefer).
- Fuel Mangment System Interface:** All versions can easily be interfaced with most existing or new key/card fuel management systems as a 10:1/100:1 pulse transmitter is fitted as standard.
- Cabinet:** Modern robust cabinet, completely stainless steel to prevent corrosion. Individual parts can be replaced in the unfortunate event of accident damage.
- Easy to Maintain:** Good access for service engineers allows for easy & quick maintenance.
(Speak to your distributor for maintenance schedule/contract)
- Supplied With:** Outlet hose.
- Compatibility:** Use to dispense AdBlue®.
- Options:** Automatic shut off nozzle. Breakaway coupling & hose retractors. Ask for full list.

NOT CURRENTLY SUITABLE FOR RESALE.

PLEASE NOTE: IF MORE THAN ONE DISPENSER IS FED VIA THE SAME SUBMERSIBLE PUMP, A SOLENOID VALVE MUST BE FITTED TO PREVENT UNAUTHORISED USE.

Supplied by

Pumptronics

S838/2